

Form 9-331a
(Feb. 1951)


(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Las Cruces

Lease No. 032096 (b)

Unit N.M.P.U.

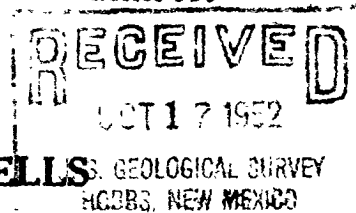

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

A. M. Lockhart B-11 No. 7 Hobbs, New Mexico October 14, 1952

Well No. 7 is located 330 ft. from N line and 480 ft. from E line of sec. 11

NE/4 Section 11 21S 37E N.M.P.M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
BRUNSON Lea New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

It is our intention to drill a well with rotary tools at the above location to a total depth of approximately 8040' or to a depth sufficient for completion in the Ellenburger horizon. All casing will be cemented in accordance with approved methods of the U.S. Geological Survey and any other special requirements will be complied with.

It is planned to use the following casing patterns: 13 3/8" casing to be set at approximately 250' and cemented with 250 sacks cement to be circulated to surface; 9 5/8" casing to be set at approximately 3150' and cemented with 1600 sacks, or sufficient cement to protect the salt section; 7" casing to be set at approximately 8040' and cemented with 850 sacks or the required amount as determined by Caliper survey, casing to be perforated opposite the pay zone.

Approval to produce it is well upon completion is also requested.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Continental Oil Company

Address Box 427

Hobbs, New Mexico

By _____

Title Asst. Dist. Supt.