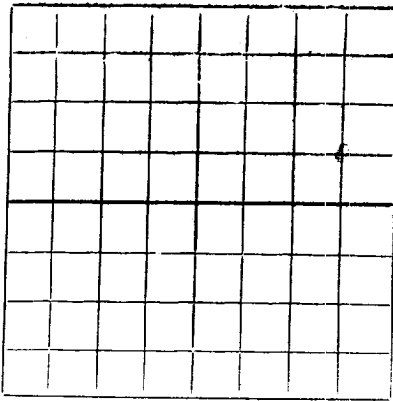


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPPLICATE.

Sinclair Oil & Gas Company
(Company or Operator)Roy Barton
(Lease)Well No. 3, in SE $\frac{1}{4}$ of NE $\frac{1}{4}$ of Sec. 23, T. 21 S, R. 37 E, NMPM.

Wantz-Abe

Pool,

Lea

County.

Well is 1980 feet from North line and 660 feet from East line of Section 23-21S-37E. If State Land the Oil and Gas Lease No. is _____.Drilling Commenced January 6, 1953 Drilling was Completed February 20, 1953.Name of Drilling Contractor Milhoan Drilling CompanyAddress Tulsa, OklahomaElevation above sea level at Top of Tubing Head 3404. The information given is to be kept confidential until _____, 19____.

OIL SANDS OR ZONES

No. 1, from 6780 to 7155 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13 3/8"	36	N	302	Larkin			
8 5/8"	24 & 36	N	2808	do			
5 1/2"	15.5	N	7348	do		7,000 to 7155	
2" UE	4.75	N	7146				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/4"	13 3/8	306	350	Halliburton		
11	8 5/8	2810	1200	do		
7 7/8	5 1/2	7348	500	do		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Acidized w/2,000 gallons of 15% special low tension by The Western Co. from 7,000 to 7,155

Result of Production Stimulation Flowed on potential test 156 Bbl. of oil in 23 hours, thru 23/64" choke

Depth Cleaned Out _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special test or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 7993 feet, and from _____ feet to _____ feet.
Cable tools were used from None feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to Producing March 1, 1953

OIL WELL: The production during the first 23 hours was 156 barrels of liquid of which 100 % was
was oil; _____ % was emulsion; _____ % water; and _____ % was sediment. A.P.I.
Gravity 39

GAS WELL: The production during the first 24 hours was _____ M.C.F. plus _____ barrels of
liquid Hydrocarbon. Shut in Pressure _____ lbs.

Length of Time Shut in _____

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

T. Anhy. _____
T. Salt 1110
B. Salt 2430
T. Yates 2580
T. 7 Rivers 2710
T. Queen _____
T. Grayburg _____
T. San Andres 3962
T. Glorieta 5155
T. Drinkard _____
T. Tubbs 6153
T. Abo 6780
T. Penn _____
T. Miss _____

T. Devonian _____
T. Silurian _____
T. Montoya _____
T. Simpson _____
T. McKee _____
T. Ellenburger _____
T. Gr. Wash 7470
T. Granite 7970
T. _____
T. _____
T. _____
T. _____
T. _____

Northwestern New Mexico

T. Ojo Alamo _____
T. Kirtland-Fruitland _____
T. Farmington _____
T. Pictured Cliffs _____
T. Menefee _____
T. Point Lookout _____
T. Mancos _____
T. Dakota _____
T. Morrison _____
T. Penn _____
T. _____
T. _____
T. _____
T. _____

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	60	60	Caliche & Sand				
60	1190	1130	Redbed & Shells				
1190	2528	1338	Anhydrite & Salt				
2528	2764	236	Anhydrite & Gyp				
2764	2811	47	Anhydrite & lime				
2811	3698	887	Lime				
3698	3808	110	Lime & sand				
3808	4261	453	Lime				
4261	4405	144	Lime & sand				
4405	7627	3222	Lime				
7627	7642	15	Lime & shale				
7642	7732	90	Lime				
7732	7831	99	99 Lime & Granite wash				
7831	7860	29	Lime				
7860	7993	133	Lime & Granite wash				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

March 6, 1953
(Date)

Company or Operator Sinclair Oil & Gas Company

Address Box 1927 Hobbs, New Mexico

Name C. C. Salter

Position or Title Dist. Supt.