

OIL CONSERVATION DIVISION

P. O. BOX 2038
SANTA FE, NEW MEXICO 87501

Form C-103
Revised 10-1-73

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

3a. Indicate Type of Lease
State ☐ Fee ☒

5. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS

DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.
(USE APPLICATION FOR PERMIT - C-101 FOR SUCH PROPOSALS.)

1. ☒ OIL WELL ☒ Dual ☐ GAS WELL ☐ OTHER		7. Unit Agreement Name
2. Name of Operator ARCO Oil and Gas Company Division of Atlantic Richfield Company		8. Farm or Lease Name Sarkeys
3. Address of Operator Box 1710, Hobbs, New Mexico 88240		9. Well No. 3
4. Location of Well UNIT LETTER I 330 FEET FROM THE East LINE AND 2310 FEET FROM THE South LINE, SECTION 23 TOWNSHIP 21S RANGE 37E N.M.P.M.		10. Field and Pool, or Wildcat Blinebry/Drinkard
11. Elevation (Show whether DF, RT, GR, etc.) 3405' GR		12. County Lea

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	PLUG AND ABANDONMENT ☐
PULL OR ALTER CASING ☐	OTHER ☒ Commingle Downhole	CASING TEST AND CEMENT JOB ☐	


17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Propose to commingle Blinebry Oil & Gas & Drinkard zones downhole & produce as a single oil well in accordance w/Order No. DHC-290 in the following manner:

1. Rig up, kill both zones, install BOP & POH w/compl assy.
2. Drill Model D pkr @ 6350', CO to PBD 6650'.
3. RIH w/RBP & pkr, set BP @ PBD, pkr @ 6400', treat Drkd perfs 6459-6636' w/1500 gals 15% HCL, benzoic acid flakes & 600 gals xylene.
4. Re-set RBP @ 6000', pkr @ 5700'. Acidize Bly perfs 5756-5901' w/2000 gals 15% HCL acid w/benzoic acid flakes & 800 gals xylene.
5. Retrieve BP & pkr.
6. RIH w/2-3/8" OD tbg w/perf nipple, API SN. Set perf nipple @ 6625', run rods & pump & return to production.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED <u><i>John Ruayan</i></u>	TITLE <u>Dist. Drlg. Supt.</u>	DATE <u>12/5/79</u>
APPROVED BY <u>John Ruayan</u> Geologist	TITLE _____	DATE <u>DEC 10 1979</u>
CONDITIONS OF APPROVAL, IF ANY:		

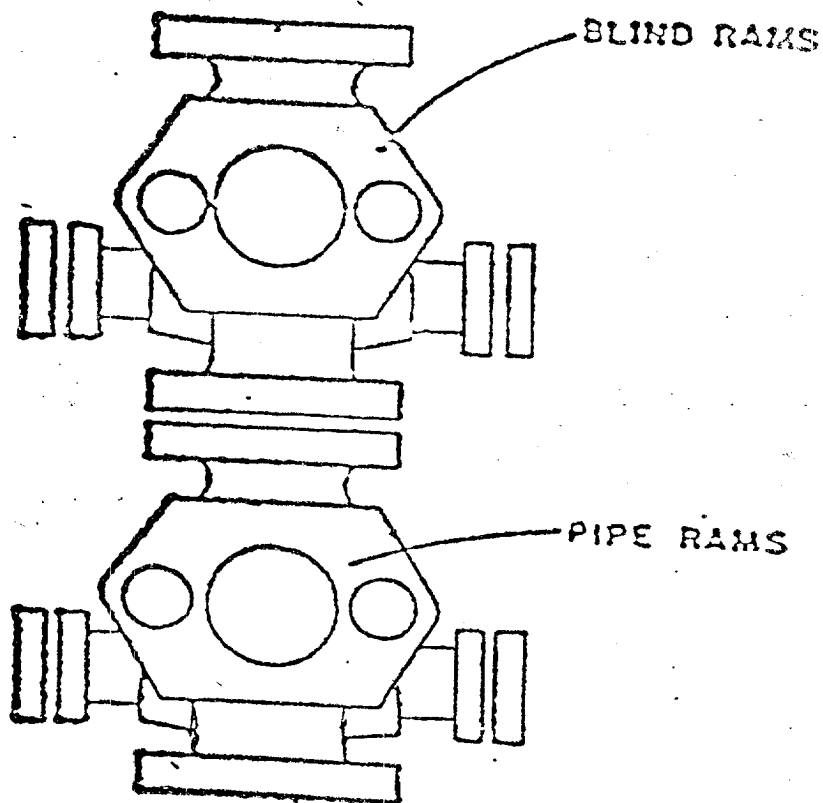

ATLANTIC RICHFIELD COMPANY
Blow Out Preventer Program

Lease Name Sarkeys

Well No. 3

Location 330' FEL & 2310' FSL
Sec 23-21S-37E, Lea County

BOP to be tested before installed on well and will be maintained in good working condition during drilling. All wellhead fittings to be of sufficient pressure to operate in a safe manner.