

C. CONSERVATION DIVISION

P. O. BOX 2038

SANTA FE, NEW MEXICO 87501

Form C-103
Revised 10-1-78

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

5a. Indicate Type of Lease
State ☐ Fee ☒

5. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR.
USE "APPLICATION FOR PERMIT - II" (FORM C-101) FOR SUCH PROPOSALS.)

1. ☐ OIL WELL ☐ GAS WELL ☐ OTHER- **Water Injection Well**

2. Name of Operator **ARCO Oil and Gas Company**
Division of Atlantic Richfield Company

3. Address of Operator
Box 1710, Hobbs, New Mexico 88240

4. Location of Well
UNIT LETTER **M** **660** FEET FROM THE **South** LINE AND **660** FEET FROM
THE **West** LINE, SECTION **27** TOWNSHIP **22S** RANGE **36E** NEPM.

15. Elevation (Show whether DF, RT, GR, etc.)
3479' GR

7. Unit Agreement Name
Seven Rivers Queen

8. Farm or Lease Name
Seven Rivers Queen Unit

9. Well No.
13

10. Field and Pool, or Wildcat
Eunice 7R Qn So

12. County
Lea

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☒

TEMPORARILY ABANDON ☐

PULL OR ALTER CASING ☐

OTHER ☐

PLUG AND ABANDON ☐

CHANGE PLANS ☐

OTHER ☐

REMEDIAL WORK ☐

COMMENCE DRILLING OPS. ☐

CASING TEST AND CEMENT JOBS ☐

OTHER ☐


ALTERING CASING ☐

PLUG AND ABANDONMENT ☐

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.


1. Rig up, kill well, install BOP, POH w/tbg.
2. RIH w/pkr on 2-7/8" tbg, set above liner @ 3312'.
3. Pump 50 sx C1 C cmt w/.75% CFR-2 thru pkr & displace to 3625' w/KCL wtr.
4. Drill out cmt. CO to PBD 3755'.
5. Set pkr above liner @ 3300', pressure test to 1750# for 30 mins.
6. Perf 7R Qn 3684-94', 3702-10', 3714-22', 3736-46' w/1 SPF.
7. RIH w/pkr, set pkr @ 3300' & treat w/4000 gals 15% HCL acid & frac w/12,000 gals gelled fluid w/9000# sd in 3 stages using rock salt in gelled brine to divert.
8. POH w/pkr. RIH w/Lok-set pkr internally plastic coated on 2-3/8" OD internally plastic coated tbg, set pkr above 3312', fill tbg/csg annulus w/corrosion inhibited water. Connect up for WI & return to injection.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED  TITLE **Dist Drlg. Supt** DATE **9/4/79**

APPROVED BY **John Runyan** TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

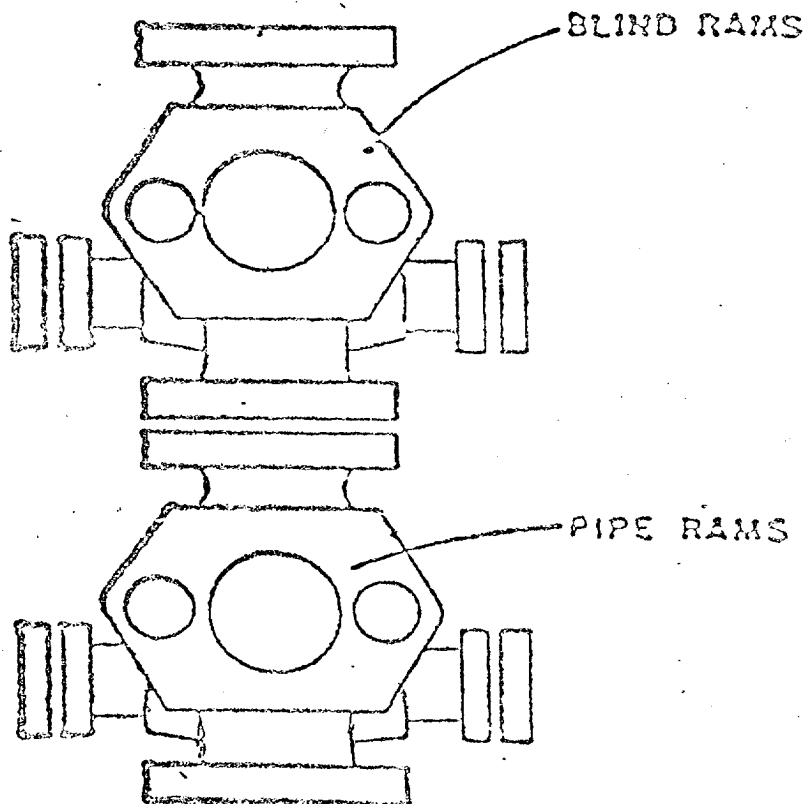

ATLANTIC RICHFIELD COMPANY
Blow Out Preventer Program

Lease Name Seven Rivers Queen Unit

Well No. 13

Location 660' FSL & 660' FWL
Sec 27-22S-36E, Lea County

BOP to be tested before installed on well and will be maintained in good working condition during drilling. . wellhead fittings to be of sufficient pressure to operate in a safe manner