


## OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

DUPLICATE

## MISCELLANEOUS REPORTS ON WELLS

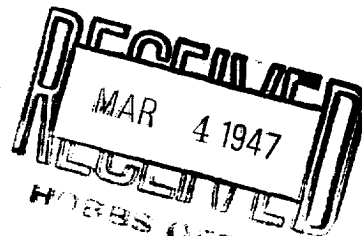

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	X	REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

March 2, 1947

Date

Monument, New Mexico,

Place

OIL CONSERVATION COMMISSION,  
SANTA FE, NEW MEXICO.

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the \_\_\_\_\_  
Amerada Petroleum Corporation H. Corrigan Well No. 8 in the \_\_\_\_\_  
 Company or Operator Lease

NW 1 NE 1 of Sec. 4, T. 22S, R. 37E, N. M. P. M.,  
Drinkard Field, Lea County.

The dates of this work were as follows: March 1, 1947

Notice of intention to do the work was (~~received~~) submitted on Form C-102 on February 26 19 47  
 and approval of the proposed plan was (~~received~~) obtained. (Cross out incorrect words.)

## DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

6590' Total Depth, Lime, nipped up and went in hole with tubing and found top of cement 6453', tested casing with 1000# for 15 minutes and was OK, drilled out cement to 6573' and tested casing with 1000# for 15 minutes and was OK, Gun perforated with Lane Wells from 6524 to 6571' with 188 holes and set 2" EUE 4.7#, J-55, Spang Tubing at 6567' with 3' perforated Nipple on bottom bull plugged and 1-6' and 2-10' Subs on top, Total of 20.9 joints and will acidize with 1000 gallons of acid.

Witnessed by K. V. Stephenson Amerada Pet. Corp., Foreman  
 Name Company Title

Subscribed and sworn before me this \_\_\_\_\_

I hereby swear or affirm that the information given above is true and correct.

2 day of March, 1947Name H. V. RippelPosition Asst. Dist. Supt.Representing Amerada Pet. Corp.,  
Company or Operator

My commission expires \_\_\_\_\_

Address Drawer D, Monument, New Mexico.

Remarks:

APPROVED  
MAR 4 1947

Date \_\_\_\_\_

Roy. Yauhrugh  
 Name  
Oil & Gas Inspector  
 Title