


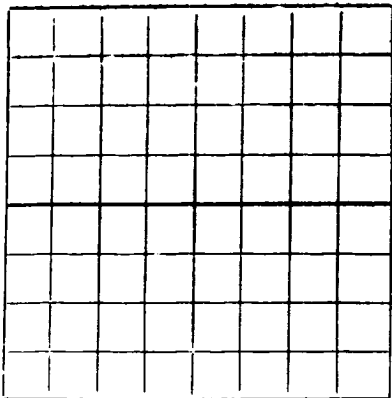

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

11-27-67

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES
LOCATE WELL CORRECTLY

ANADARKO PRODUCTION COMPANY

(Company or Operator)

Langlie Mattix Perrose Sand Unit Tr. 24

(Lease)

Well No. 4, in NW 1/4 of SE 1/4, of Sec. 28, T. 22 S., R. 37 E., NMPM.

Langlie Mattix

Pool,

Lea

County.

Well is 1330 feet from South line and 1330 feet from East line

of Section 28. If State Land the Oil and Gas Lease No. is

Drilling Commenced 6/19/67, 19. Drilling was Completed 6/27/67, 19.

Name of Drilling Contractor Leatherwood Drilling Company

Address P. O. Drawer N, Kermit, Texas

Elevation above sea level at Top of Tubing Head 3346' GR. The information given is to be kept confidential until, 19.

OIL SANDS OR ZONES

No. 1, from 3530' to 3647' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8 5/8"	36#	New	317	Guide			Surface
4 1/2"	11.60#	New	3670'	Float		3530'-3647'	Production 1

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8 5/8"	317	175	Pump & plug		
6 3/4"	4 1/2"	3670'	230	Pump & plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Perforated 2 JSPF 3530'-34', 3544'-46', 3554'-58', 3562'-66', 3574'-76', 3578'-82', 3610'-14',

3620'-24', 3637'-39', 3644'-47'. Treated perms with 1000 gal. 15% NE acid.

Press. min. 1000#, max. 2000# at 4 BPM.

Result of Production Stimulation On water injection

Depth Cleaned Out 3668'

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 3685' feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing, 19
OIL WELL: The production during the first 24 hours was barrels of liquid of which % was
was oil; % was emulsion; % water; and % was sediment. A.P.I.
Gravity.
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico				Northwestern New Mexico			
T. Anhy.	1140'	T. Devonian		T. Ojo Alamo			
T. Salt.	1250'	T. Silurian		T. Kirtland-Fruitland			
B. Salt.	2490'	T. Montoya		T. Farmington			
T. Yates	2625'	T. Simpson		T. Pictured Cliffs			
T. 7 Rivers	2890'	T. McKee		T. Menefee			
T. Queen	3380'	T. Ellenburger		T. Point Lookout			
T. Grayburg		T. Gr. Wash		T. Mancos			
T. San Andres		T. Granite		T. Dakota			
T. Glorieta		T.		T. Morrison			
T. Drinkard		T.		T. Penn			
T. Tubbs		T.		T.			
T. Abo		T.		T.			
T. Penn		T.		T.			
T. Miss		T.		T.			

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	25	25	Caliche				
25	50	25	Sand and caliche				
50	70	20	Red beds				
70	110	40	Sand				
110	800	690	Red beds				
800	825	25	Sand				
825	1140	315	Red beds and shale				
1140	1250	110	Anhydrite				
1250	2490	1240	Salt				
2490	3340	850	Dolomite & anhydrite				
3340	3685	345	Dolomite w/sand stringers				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

9/22/67 (Date)
Company or Operator Anadarko Production Co. Address P. O. Box 247, Hobbs, N. M.
Name M. F. Nelson Position or Title District Superintendent