

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

# NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103  
Supersedes Old  
C-102 and C-103  
Effective 1-1-65

5a. Indicate Type of Lease
State <input checked="" type="checkbox"/> Fee <input type="checkbox"/>
5. State Oil & Gas Lease No.
<b>B-3480.1</b>

## SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	7. Unit Agreement Name
2. Name of Operator <b>Gulf Oil Corporation</b>	8. Farm or Lease Name <b>R. E. Cole (NCT-A)</b>
3. Address of Operator <b>Box 670, Hobbs, N.M. 88240</b>	9. Well No. <b>14</b>
4. Location of Well UNIT LETTER <b>F</b> <b>2310</b> FEET FROM THE <b>north</b> LINE AND <b>1650</b> FEET FROM THE <b>west</b> LINE, SECTION <b>16</b> TOWNSHIP <b>22S</b> RANGE <b>37E</b> NMPM.	10. Field and Pool, or Wildcat <b>So. McCormack Silurian</b>
15. Elevation (Show whether DF, RT, GR, etc.)	12. County <b>Lea</b>

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF:

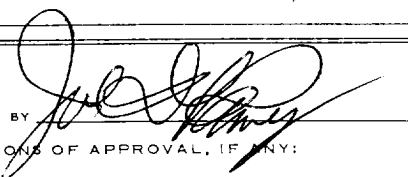
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input checked="" type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOBS <input checked="" type="checkbox"/>	OTHER <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Moran Drilling Company spudded 11" surface hole at 11:30 a.m., August 9, 1971 and drilled to 1161'. Ran 37 joints, 1142', 8-5/8" OD 24# K-55 ST&C casing set and cemented at 1156' with 200 sacks of Class C with 4% Gal and 2% CaCl2 and 200 sacks of Class C with 2% CaCl2. Cement circulated. WOC & NU 18 1/2 hours. Tested casing with 1000# 30 minutes, OK.

Started drilling 7-7/8" hole at 1161' at 6:00 a.m., August 11, 1971.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED	TITLE <b>Area Petroleum Engineer</b>	DATE <b>8-11-71</b>
APPROVED BY 	TITLE <b>SUPERVISOR DISTRICT I</b>	DATE <b>AUG 13 1971</b>
CONDITIONS OF APPROVAL, IF ANY:		

RECEIVED

AUG 12 1971

OIL CONSERVATION COMM.  
HOBB, L. L.