

ROS WELL DISTRICT

N. M. OIL CONS. COMMISSION

P. O. BOX 1930

MOBBS, NEW MEXICO 88240

Approved:
Budget Bureau No. 42-R1424

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☐ other WATER SUPPLY
2. NAME OF OPERATOR
CONOCO INC.
3. ADDRESS OF OPERATOR
P.O. Box 450, Hobbs, N.M. 88240
4. LOCATION OF WELL. REPORT LOCATION CLEARLY. See space 17 below:
AT SURFACE: 1980' FSL + 660' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF	☐	☐
FRACURE TREAT	☐	☐
SHOOT OR ACIDIZE	☐	☐
REPAIR WELL	☐	☐
PULL OR ALTER CASING	☐	☐
MULTIPLE COMPLETE	☐	☐
CHANGE ZONES	☐	☐
ABANDON*	☒	☐
(other)	☐	☐

5. LEASE
LC-029864 (B)
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
NMFU
8. FARM OR LEASE NAME
DANCIGER B
9. WELL NO.
2
10. FIELD OR WILDCAT NAME
CAPITAN REEF
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
SEC. 6, T-23S, R-36E
12. COUNTY OR PARISH 13. STATE
LEA NM
14. API NO
15. ELEVATIONS (SHOW DF, KDB, AND WD)
42

(NOTE: Report results of multiple completion or zone change on Form 9-331-C)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

MIRU. DO CMT PLUG FROM 1450' - 1965'. SPOT 35
SXS CLASS "C" w/2% CaCl₂ 3584' - 3690'. SPOT
297 SXS CLASS "C" w/2% CaCl₂ 1445' - 2070'.
* SPOT 53 SXS CLASS "C" w/2% CaCl₂ 104' TO
SURFACE. ERECT P+A MARKER, CLEAN LOCATION.
(ABANDONMENT IS RECOMMENDED BECAUSE THE WELL
IS NON-PRODUCTIVE + WATER IS NO LONGER NEEDED.)
Subsurface Safety Valve: Manu. and Type Set to

18. I hereby certify that the foregoing is true and correct.

SIGNED W. A. Butterfield TITLE APPROVED DATE 9/28/83

APPROVED BY DEC 13 1983
COMPLETION OF APPROVAL (IF ANY)

TITLE DATE


* additional plug needed, in 4' below
11 3/4" casing, from 677' - 577'. P.W.C.

*See Instructions on Reverse Side

3497 GL ; 3506 KB

1980 FSL & 660 FWL
602 6-T235-R36E

P&A

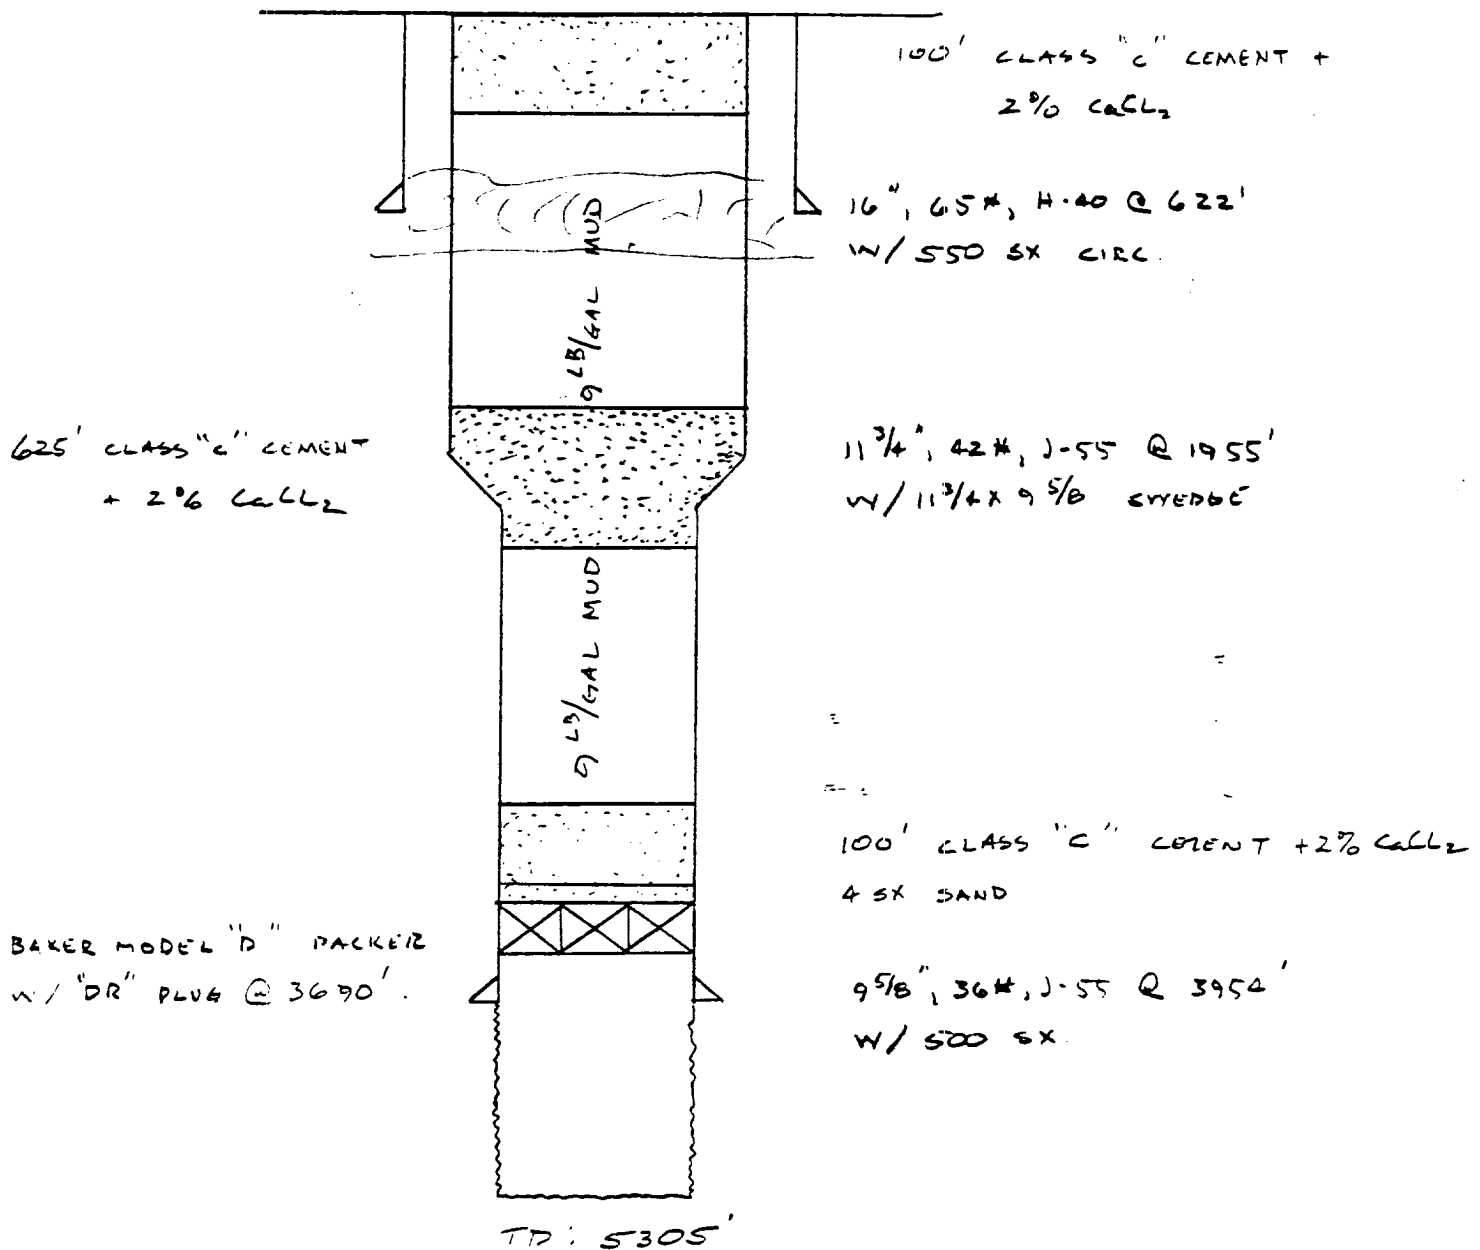

RT

7-14-83

DANGER B WSW NO. 2

NMFU