

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division  
P.O. Box 1980  
Hobbs, NM 88241

FORM APPROVED

Budget Bureau No. 1004-0135

Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT -" for such proposals

5. Lease Designation and Serial No.

LC-032104

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

SUBMIT IN TRIPLICATE

1. Type of Well: ☒ OIL WELL ☐ GAS WELL ☐ OTHER

2. Name of Operator  
TEXACO EXPLORATION & PRODUCTION INC.

3. Address and Telephone No.  
P.O. Box 2100, Denver Colorado 80201 (303)793-4851

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Unit Letter E : 2630 Feet From The NORTH Line and 160 Feet From The

WEST Line Section 20 Township 22-S Range 38-E

8. Well Name and Number

A. H. BLINEBRY FEDERAL NCT-1

49

9. API Well No.

30-025-33936

10. Field and Pool, Exploratory Area

SOUTH BRUNSON DRINKARD-ABO, TUBB O&G, BL

11. County or Parish, State

LEA, NM

12. Check Appropriate Box(s) To Indicate Nature of Notice, Report, or Other Data

TYPE OF SUBMISSION

TYPE OF ACTION

- ☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice


- ☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ OTHER. SPUD, SURF CSG, PROD CSG

- ☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log Form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

- NABORS RIG #348 SPUD 11 INCH HOLE @ 7:00 PM 05-28-97. DRILLED TO 1376'. TD @ 1415 HOURS 05-28-97.
- RAN 31 JOINTS OF 8 5/8 INCH, 24#, WC-50, STC CASING SET @ 1380'. RAN 8 CENTRALIZERS.
- DOWELL CEMENTED WITH 400 SACKS CLASS C W/ 2% GEL, 2% CACL2 (13.8 PPG, 1.74 CF/S). F/B 200 SACKS CLASS C W/ 2% CACL2 (14.8 PPG, 1.32 CF/S). PLUG DOWN @ 8:00 PM 05-28-97. CIRCULATED 164 SACKS.
- NU BOP & TESTED TO 1200#. TESTED CASING TO 1200# FOR 30 MINUTES FROM 3:30 PM TO 4:00 PM 05-29-97.
- WOC TIME 19 HOURS FROM 8:00 PM 05-28-97 05-28-97 TO 3:30 PM 05-29-97.
- DRILLING 7 7/8 INCH HOLE.
- DRILLED 7 7/8 INCH HOLE TO 7200'. TD @ 6:15 AM 06-14-97.
- LOG W/SCHLUMBERGER - LOGGERS DEPTH @ 7200'. BOARD @ 7200' - RUN PLATFORM EXPRESS AND BOREHOLE COMP SONIC W/GAMMA RAY LOGS.
- RAN 69 JOINTS OF 5 1/2 INCH, 17#, WC-75 AND 1 JOINT OF 5 1/2 INCH, 17#, L-80, 97 JOINTS OF 5 1/2 INCH, 15.5#, US-50 LTC CASING SET @ 7200'.
- DOWELL CEMENTED: 1950 SACKS 35/65 POZ CLASS H W/ 6% GEL, 5% SALT, 1/4# FLOCELE (12.8 PPG, 1.94 CF/S). F/B 500 SACKS 50/50 POZ CLASS H W/2% GEL, 5% SALT, 1/4# FLOCELE (14.2 PPG, 1.35 CF/S). PLUG DOWN @ 4:15 PM 06-15-97. CIRCULATED 521 SACKS.
- ND. RELEASE RIG @ 9:00 PM 06-15-97.
- PREP TO COMPLETE.

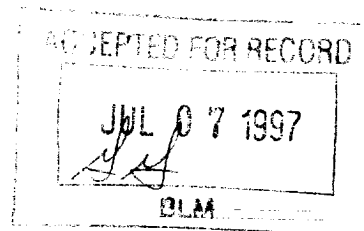

14. I hereby certify that the foregoing is true and correct

SIGNATURE C. P. Basham / SETH TITLE Eng. Assistant.

TYPE OR PRINT NAME Sheilla D. Reed-High

DATE

7/1/97

(This space for Federal or State office use)

APPROVED

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.