

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other

2. NAME OF OPERATOR  
Tenneco Oil Company

3. ADDRESS OF OPERATOR  
7990 IH 10 West; San Antonio, Texas 78230

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE:  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

☐  
☐  
☒  
☐  
☐  
☐  
☐  
☐

5. LEASE

LC-062269E

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Ernest Federal

9. WELL NO.

1

10. FIELD OR WILDCAT NAME

Double X Delaware

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 23, T24S, R32E

12. COUNTY OR PARISH

Lea


13. STATE

New Mexico

14. API NO.

15. ELEVATIONS (SHOW DE, KDS, AND WD)

(NOTE: Report results of multiple completions or zone change on Form 9-330.)

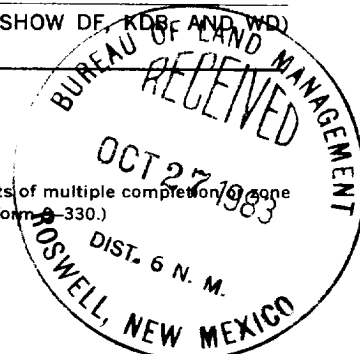

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

1. MIRU PU. POOH w/rods and pump. NUBOP. Tag bottom with tubing. Found 14' of fill.
2. Sand pumped.
3. POOH w/tubing. RIH w/tubing and treating packer. Set packer @ + 4850. Acidize perforations at 4906-37 w/5000 gals. 15% HCI w/iron chelating agent and oxygen scavenger. Used ball sealers for selectivity. Rate: + 6 BPM. Max. press.: 2200# Flush w/2% KCI. Unseat PKR and POOH w/tubing and packer. RIH w/tubing and seating nipple to + 4906. NOBOP. RIH w/rods and pumps, RDPV.
4. Return to production.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Robert B. Mathew TITLE Prod. Eng. Suprv. DATE 10-21-83

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

OCT 31 1983