

U.S. OFFICE O. C. C.  
JUL 6 11 37 AM '67


Short Tubing String (McKee):  
2-1/16" OD 3.20# J-55 Type IJ  
suspended @ 9170', with six  
Camco Type J-40 valves on Type B  
Mandrels @ 6825', 7405', 7927',  
8447', 8900' and 9129'.

Long Tubing String (Ellenburger):  
2-7/8" OD 6.40# NU J-55 Seal-Lock  
Suspended @ 9687'.

McKee Perforations:

9236-38'  
9276-78'  
9334-36'  
9360-62'  
9385-87'

Ellenburger Perforations:  
9700-50'

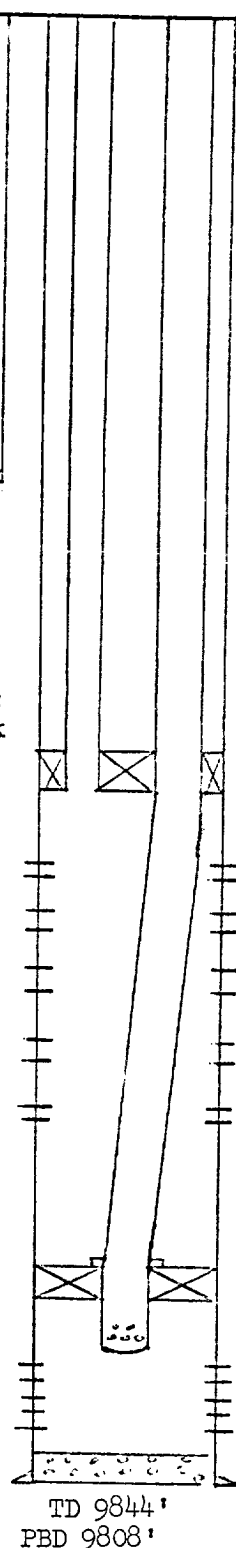

13-3/8" OD Casing @ 296'  
cemented with 300 sks. circulated

9-5/8" OD Casing @ 2900',  
cemented with 1625 sks.,  
Top Cement @ 210'.

Baker Model "J" Packer @ 9171'

Baker Model "D" Packer @ 9650'

7" OD Casing @ 9843'  
Cemented with 975 sks.  
Top Cement @ 5350'

TD 9844'  
PBD 9808'

DIAGRAMMATIC SKETCH OF MECHANICAL INSTALLATION  
C. E. LAMUNYON NO. 11 - OIL-OIL DUAL COMPLETION  
Teague (Ellenburger) and Teague (McKee) Pools  
Section 27-23S-37E, Lea County, New Mexico  
GULF OIL CORPORATION