


INJECTION WELL DATA SHEET

OPERATOR: Texaco Exploration & Production Inc. WELL: Rhodes Yates Unit #12 WIW
FOOTAGE LOCATION: 990 FSL, 2310 FWL sec./Twn/Rng: Unit N, Section 27, T-26-S, R-37-E
Former Anderson-Pritchard Oil Corp. Gregory Morris (B) #3 Lea County, New Mexico

SCHEMATIC

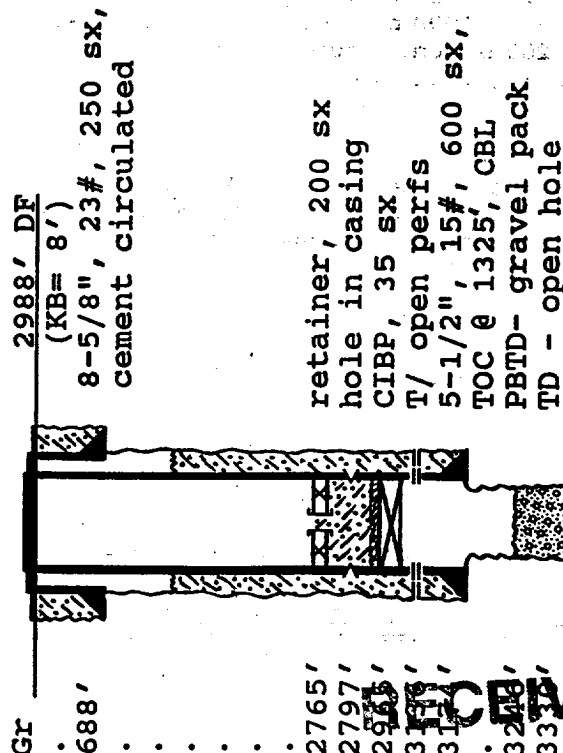

TABULAR DATA

Surface Casing: Set at: 688 '
Size 8-5/8, 23# Cemented with 250 sx.
TOC surface , determined by circulated
Hole Size 12-1/4" Comp. Date 11-22-45
Intermediate casing: Set at: '
Size none Cemented with sx.
TOC , determined by
Hole Size
Production Casing: Set at: 3174 '
Size 5-1/2", 15# Cemented with 600 sx.
TOC 3325' determined by HLS- CBL
Hole Size 7-7/8", 4-3/4" open hole

Injection Interval:

3136 ' to 3246 ' through: open hole, perfs

Squeezed perfs: 2972'-3036' , 3048'-3118' , 2/74

Driller's Tops:
Salt 1170'- 2830'
Yates 2988'
Seven Rivers na

JUN 22 1993

COO HOBBS
OFFICE