

Form 3160-5
(June 1990)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division
P.O. Box 1980
Hobbs, NM 88241

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.

LC 030556B

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Stevens B No. 20

9. API Well No.

30-025-22288

10. Field and Pool, or Exploratory Area

Langlie Mattix

11. County or Parish, State

Lea County, NM

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Conoco, Inc.

3. Address and Telephone No.

10 Desta Dr., Suite 100 W., Midland, TX 79705 915-686-6548

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660' FNL & 1650' FEL
Section 18, T-23S, R-37E

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other _____
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

1. Spot 10 sxs cement on top of R.B.P. at 3542'.
2. Circulate hole with mud.
3. Spot 25 sxs cement 2735' - 3110'.
4. Spot 25 sxs cement 975' - 1300'.
5. Perforate 4 1/2" casing at 400'. Circulate 75 sxs cement to surface.
6. Install dryhole marker and clean location.

RECEIVED
NOV 6 9 24 AM '96

14. I hereby certify that the foregoing is true and correct

Signed

David R. Glass

Title

Sr. Conservation Coordinator

Date

7

(This space for Federal or State office use)

Approved by

(ORIG. SGD.) DAVID R. GLASS

Title

PETROLEUM ENGINEER

Date

11/15/96

Conditions of approval, if any:

SEE ATTACHED FOR


NOV 12 1996

Title 18 U.S.C. Section 1001, making it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

CURRENT WELLBORE

10/31/96

Elev. = 3339'

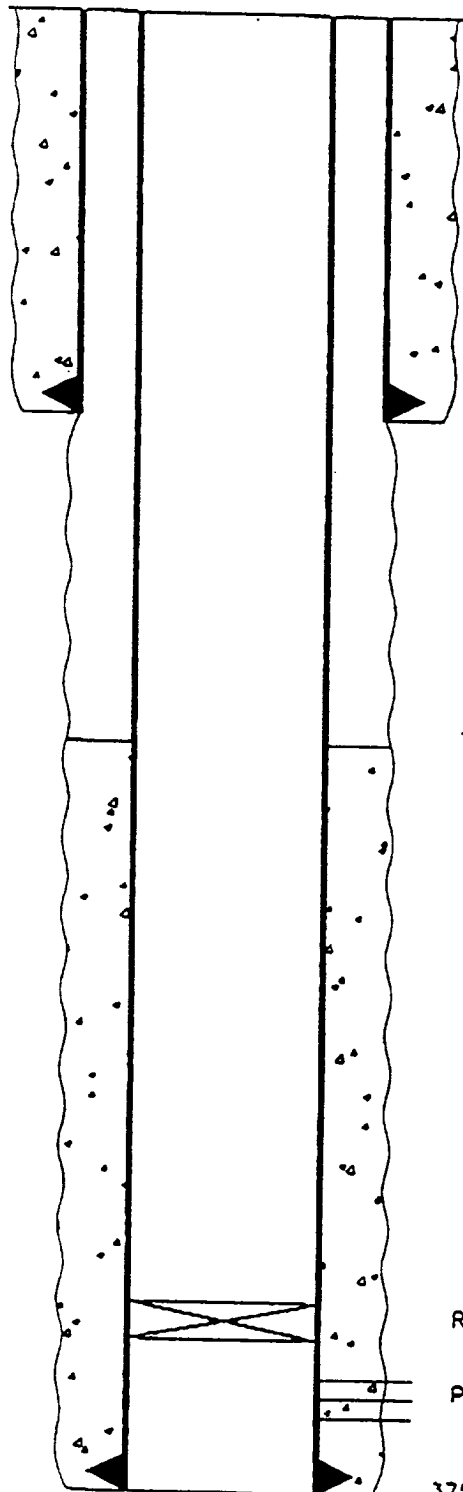

336' - 7 5/8" Casing. Cemented w/150 sxs. Circulated to Surface

T.O.C. @ 2300' (Temp. Survey)

R.B.P. @ 3542'

Perfs 3621'-3717'

3752' - 4 1/2", 9.5#, Casing. Cemented w/200 sxs

T.D. @ 3757'

CONOCO, INC.
Stevens B #20
660' FNL & 1650' FEL
Sec. 18, T-23S, R-37E
Lea County, NM