

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE\*  
(Other instructions on re-  
verse side)

Budget Bureau No. 1004-0135  
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	5. LEASE DESIGNATION AND SERIAL NO. LC-064118
2. NAME OF OPERATOR Plains Petroleum Operating Company	6. IF INDIAN, ALLOTTEE OR TRIBE NAME
3. ADDRESS OF OPERATOR 415 West Wall, Suite 1000, Midland, TX 79701	7. UNIT AGREEMENT NAME
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface  Unit M, 985' FSL & 660' FWL	8. FARM OR LEASE NAME E. C. Hill B Federal
14. PERMIT NO.	9. WELL NO. #10
15. ELEVATIONS (Show whether DF, RT, GR, etc.) 3251' GR	10. FIELD AND POOL, OR WILDCAT Teague Blinberry
	11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec 35, T23S, R37E
	12. COUNTY OR PARISH Lea
	13. STATE NM

18. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF	PULL OR ALTER CASING
FRACTURE TREAT	MULTIPLE COMPLETE
SHOOT OR ACIDIZE	ABANDON*
REPAIR WELL	CHANGE PLANS
(Other)	

SUBSEQUENT REPORT OF:

WATER SHUT-OFF	REPAIRING WELL
FRACTURE TREATMENT	ALTERING CASING
SHOOTING OR ACIDIZING	ABANDONMENT*
(Other)	


(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) \*

09-10-93

Hondo Drilling Co. spud 17-1/2" surface hole.

Ran 2 centralizers, 8 jts 13-3/8" 48#/ft H-40 STC csg. Set @ 354'. Cement w/375 sx Class 'C' + 2% CaCl<sub>2</sub>, Displace with 49.5 BFW. Circ 31 sx to pit. Called BLM to witness job, a representative was not present.

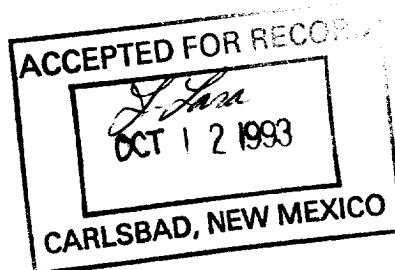

RECEIVED  
SEP 16 10 27 AM '93  
OFFICE  
AREA

18. I hereby certify that the foregoing is true and correct

SIGNED

*Donna J. [Signature]*

TITLE

Area Engineer

DATE

September 14, 1993

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side