

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised March 25, 1999

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.
30-025-12233

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

B-9519

7. Lease Name or Unit Agreement Name:

West Dollarhide
Drinkard Unit

8. Well No.

36

9. Pool name or Wildcat Dollarhide,
Tubb/Drinkard

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well:

Oil Well ☐ Gas Well ☐ Other ☐ Injector

2. Name of Operator

Texaco Exploration & Production, Inc.

3. Address of Operator

P. O. Box 3109, Midland, TX 79702

4. Well Location

Unit Letter O : 660 feet from the South line and 1980 feet from the East line

Section 29

Township 24S Range 38E NMPM Lea County

10. Elevation (Show whether DR, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

- Set 5 1/2" CIBP @ 6520', Spot 25 Sx plug 6520'-6320' (Drinkard) WOC Tag
- Displace hole w/MLF, 9.5# Brine w/25# gel P/BBL
- Perf 6 holes @ 3800' Sqz 50 Sx plug 3800'-3600' (Queen)
- Perf 6 holes @ 3200', Sqz 100 Sx plug 3200'-2600' (9 5/8" shoe, Yates, B-Salt) WOC Tag
- Perf 6 holes @ 1400', Sqz 50 Sx plug 1400'-1200' (T-Salt) WOC Tag
- Perf 6 holes @ 250', attempt to sqz 75 Sx 250'-100' (13 3/8" shoe) 5 1/2" X 13 3/8". WOC Tag
Records show 2/23/95. Perf @ 500' Circ Cmt 5 1/2" X 9 5/8"
- 10 Sx Surface, Install dry hole marker.

THE COMMISSION MUST BE NOTIFIED 24
HOURS PRIOR TO THE BEGINNING OF
PLUGGING OPERATIONS FOR THE C-103
TO BE APPROVED.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

James T. Corbett
JAMES T. CORBETT

TITLE FACILITY ENGINEER

DATE 9/24/01

Type or print name

Telephone No. 688-4438

(This space for State use)

APPROVED BY

TITLE

DATE

Conditions of approval, if any:

mlp

(3 STRING CSNG)

OPERATOR TEXACO EXPLORATION & PRODUCTION
EASENAME WEST DOLLACHE DEINKARD UNIT


WELL # 36

SECT 29 TWN 24S RNG 38E

FROM 660 NISL 1980 EWL

TD: 6940 INFORMATION @ TD

PBTD: 6731 FORMATION @ PBTD Deiukaes

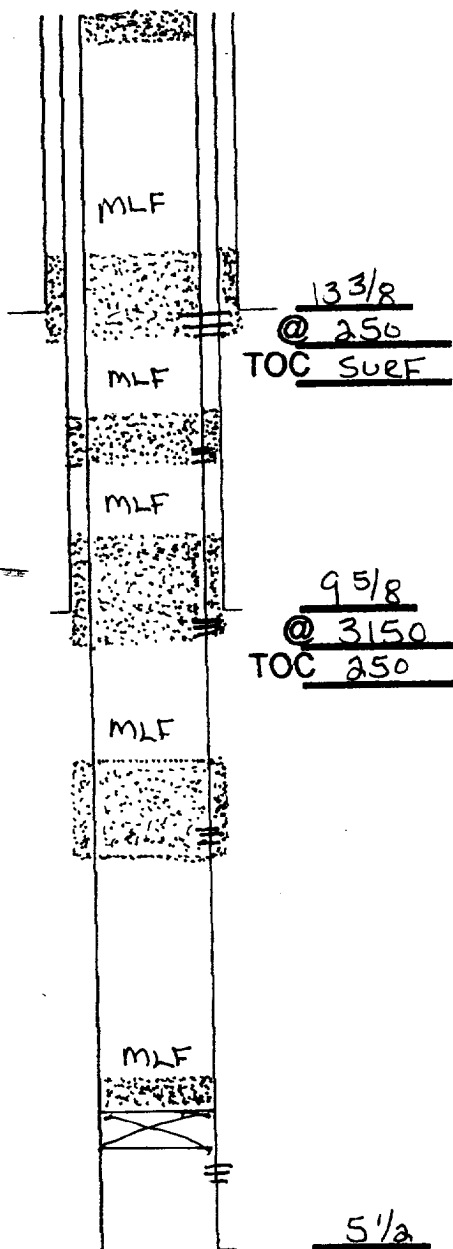

133/8
@ 250
TOC SURF

95/8
@ 3150
TOC 250

5 1/2
@ 6940
TOC 4700

TD 6940

	SIZE	SET @	TOC	TOC DETERMINED BY	
SURFACE	13 3/8	250	SURF	CIRC	
INTMED 1	45/8	3150	250	TS	
INTMED 2					
PROD	5 1/2	6940	4700	CALC	
	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					
	CUT & PULL @			TOP - BOTTOM	
INTMED 1			PERFS	6570 - 6672	
INTMED 2			OPENHOLE	-	
PROD					

*** REQUIRED PLUGS DISTRICT I**

RUSTLER (ANHYD)	
YATES	
QUEEN	
GRAYBURG	
HAN ANDREE	
CAPTAN REEF	
DELAWARE	
BELL CANYON	
CHERRY CANYON	
SHUBBY CANYON	
BONE SPRING	
OLORIETA	
SLINEKEY	
TUBS	
OVERKARD	
ABO	
WC	
PENN	
STRAWN	
ATOKA	
MORROW	
MISS	
DEVOREAN	

[illegible]