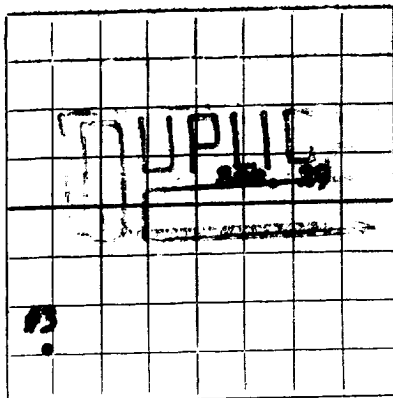
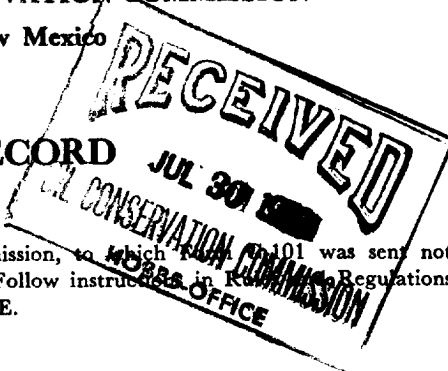


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Regulations of the Commission. Submit in QUINTUPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Skelly Oil Company

(Company or Operator)

Mexico "K"

(Lease)

Well No. **3**, in **SW** $\frac{1}{4}$ of **SW** $\frac{1}{4}$ of Sec. **29**, T. **24S**, R. **30E**, NMPM.
Dollarhide Queen Pool, **Lee** County.

Well is **618** feet from **South** line and **618** feet from **West** line
of Section **29**. If State Land the Oil and Gas Lease No. is _____.

Drilling Commenced **June 29,** 19 **53** Drilling was Completed **July 26,** 19 **53**

Name of Drilling Contractor **Cactus Drilling Company**

Address **San Angelo, Texas**

Elevation above sea level at Top of Tubing Head **3174' BP**. The information given is to be kept confidential until
Not Confidential _____, 19 _____.

OIL SANDS OR ZONES

No. 1, from **3665'** to **3752'** No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8"	32#	New	1235'	Float			Surface
5-1/2"	17#	New	3650'	"			Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	1245'	400	Halliburton		
7-7/8"	5-1/2"	3665'	400	"		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Stratafraced open hole section 3665-3752' with 3000 Gals.

Result of Production Stimulation **After treatment well flowed 9 Hrs. 63 Bbls. oil thru 3/4" chokm.**

On natural production test well flowed 7 Hrs. 84 Bbls. oil.

Depth Cleaned Out _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 1245 feet, and from feet to feet.
Cable tools were used from 1245 feet to 3752 feet, and from feet to feet.

PRODUCTION

Put to Producing July 23, 1953

OIL WELL: The production during the first 24 hours was 200 barrels of liquid of which 100 % was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy.	1200'		T. Devonian		T. Ojo Alamo
T. Salt.	1278'		T. Silurian		T. Kirtland-Fruitland
B. Salt.	2540'		T. Montoya		T. Farmington
T. Yates			T. Simpson		T. Pictured Cliffs
T. 7 Rivers	2972'		T. McKee		T. Menefee
T. Queen	3645'		T. Ellenburger		T. Point Lookout
T. Grayburg			T. Gr. Wash		T. Mancos
T. San Andres			T. Granite		T. Dakota
T. Gloricta			T.		T. Morrison
T. Drinkard			T.		T. Penn.
T. Tubbs			T.		T.
T. Abo			T.		T.
T. Penn.			T.		T.
T. Miss.			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0'	1200'	1200'	Red Bed, Sand & shale				
1200	1278	78	Red bed & anhydrite				
1278	2540	1262	Anhydrite, salt & shale				
2540	2972	432	Anhydrite & lime				
2972	3395	423	Anhydrite, lime & sand				
3395	3752	357	Lime & sand				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

July 29, 1953 (Date)
Company or Operator Shelly Oil Company Address Box 38 - Hobbs, New Mexico
Name J. N. Williams Position or Title Dist. Supt.