


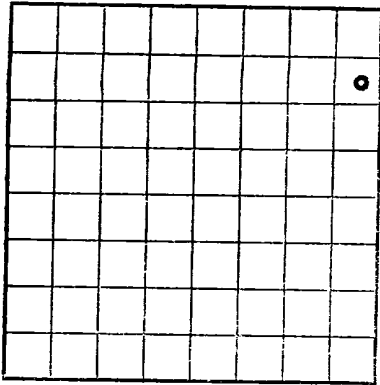

LOCATE WELL CORRECTLY

U. S. LAND OFFICE **Las Cruces**
SERIAL NUMBER **069052**
LEASE OR PERMIT TO PROSPECTUNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company **L. E. Elliott** Address **Roswell, New Mexico**
Lessor or Tract **m Elliott "H"** Field **West Dollarhide** State **New Mexico**
Well No. **2** Sec. **31** T. **24SR.** **38E** Meridian **N.M.P.M.** County **Lea**
Location **990 ft. [XXX] of N. Line and 330 ft. [XXX] of E. Line of Section 31** Elevation **3148**
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed *[Signature]*Date **December 3, 1952**Title **Agent**

The summary on this page is for the condition of the well at above date.

Commenced drilling **October 23**, 19 **52** Finished drilling **November 23**, 19 **52**

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 3605 to 3655 G	No. 4, from 3735 to 3745 0
No. 2, from 3690 to 3705 0	No. 5, from 6472 to 6480 0
No. 3, from 3715 to 3725 0	No. 6, from 6490 to 6494 0
	6496 to 6504 0

IMPORTANT WATER SANDS

No. 1, from _____ to _____	No. 3, from _____ to _____
No. 2, from _____ to _____	No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
13 3/8	48#	8	Spang	186'	T. .				
9 5/8	36#	8	"	2989'	Float				
7"	20#	8	"	6399'	Float				

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
13 3/8	199	200	Plug	9.2	
9 5/8	3002	2050	Plug	9.4	
7"	6411	400	Plug	9.2	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
		Acid	500 G	11/30	6487-6515	
		Acid	1000 G	12/1	6487-6515	

TOOLS USED

Rotary tools were used from **0** feet to **6515** feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

----- **December 3** -----, 19 **52** Put to producing ----- **December 1** -----, 19 **52**

The production for the first 24 hours was **456** barrels of fluid of which **96** % was oil; _____ % emulsion; _____ % water; and **4** % sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

J. J. Chambers _____, Driller **D. R. Robinson** _____, Driller
J. R. Mathews _____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	215	215	Surface Soil - Caliche - Red Beds
215	1198	983	Red Beds and Shells
1198	1300	102	Anhydrite and Gypsum
1300	2386	1086	Anhydrite, Gypsum, Salt
2386	2523	137	Anhydrite and Gypsum
2523	2592	69	Lime and Gypsum
2592	2686	94	Anhydrite and Gypsum
2686	2820	134	Lime and Anhydrite
2820	2884	64	Anhydrite
2884	2985	101	Anhydrite and Lime
2985	3760	775	Lime
3760	6515	2755	Lime

Registration Information

RE-ISSUED COMPLETION

© Copyrighted Report

COUNTY DEAR

FIELD *Dollarhide

STATE NM

OPR - GETTY OIL CO.

API 30-025-12273

NO 46 LEASE West Dollarhide (Drinkard) Unit

MAP

Sec 31, T24S, R38E

CO-ORD

990 FNL, 330 FEL of Sec

2-2-43 NM

5 3/4 mi NE/Jal

RE SPD 11-17-82 REP 11-29-82

CP:

13 3/8-199-200 sx

9 5/8-3002-2050 sx

7-6411-400 sx

5 1/2-lnr-6307-6505-set (Slotted)

WELL CLASS: INIT DX FIN DO LSE. CODE

FORMATION

DATUM

FORMATION

DATUM

ID 6515 (DRKD)

PBD 6505

(Drinkard) Slots 6411-6505 NO NEW POTENTIAL

CONTR

OPRSELEV 3159 GL

sub-s

ILLEGIBLE

F.R.C. 2-12-83 OWWO

PD 6505 WO

(Orig. Elliott, Inc. #2 Elliott Federal "H",

Cmp 11-30-52 from (Drinkard) OH 6411-6515,

OTD 6515)

2-7-83

TD 6515; PBD 6505; Complete

CO to 6515

Ran 5 1/2 slotted lnr

Acid Slots (6411-6505) 8400 gals

*Denotes changes & additions

2-12-83

COMPLETION ISSUED

5-7-83

RE-ISSUED COMPLETION: Formerly Dollarhide, W.

2-2-43 NM

IC 30-025-70108-83

COUNTY **FEA** FIELD **Dollarhide, W.** STATE **NM**
 OPR. **GETTY OIL CO.** API **30-025-12273**
 NO **46** **11 1/2 West Dollardhide (Drinkard) Unit** MAP
Sec 31, T24S, R38E CO-ORD
990 FNL, 330 FEL of Sec **2-2-43 NM**
5 3/4 mi NE/Jal RESPD **11-17-82** RECMP **11-29-82**

CMT:	WELL CLASS: INIT DX FIN DO LSE. CODE			
	FORMATION	DATUM	FORMATION	DATUM
TD 6515 (DRKD)			PBD	6505

(Drinkard) Slots 6411-6505 NO NEW POTENTIAL

CONTR OPRN LTRV **3159 GL** sub-s

F.R.C. 2-12-83 OWWO
 PD 6505 WO
 (Orig. Elliott, Inc., #2 Elliott Federal "H",
 Cmp. 11-30-52 from (Drinkard) OH 6411-6515,
 OTD 6515)
 2-7-83 TD 6515; PBD 6505; Complete
 CO to 6515
 Ran 5 1/2 slotted lnr
 Acid Slots (6411-6505) 8400 gals
 2-12-83 COMPLETION ISSUED

2-2-43 NM
 IC 30-025-70108-83