

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

TRIPPLICATE
 MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

June 28, 1954
(Date)Hobbs, New Mexico
(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Gulf Oil Corporation

(Company or Operator)

Harry Leonard "A"

(Lease)

DPL Company

(Contractor)

Well No. 38 in the SW 1/4 SW 1/4 of Sec. 33

T. 24-S, R. 38-E, NMPM, Undesignated Pool, Lea County.

The Dates of this work were as follows: June 24-26, 1954

Notice of intention to do the work (~~was~~) (was not) submitted on Form C-102 on _____, 19____, (Cross out incorrect words)and approval of the proposed plan (~~was~~) (was not) obtained.

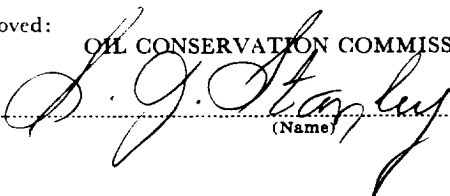
DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Ran 115 Jts, 1 nipple (3592') 7" OD 20# Gr J-55 SS casing. Set and cemented at 3604' with 1175 sacks cement in 2 stages. 1st stage with 700 sacks 4% Gel and 150 sacks Regular Neat on bottom. Maximum pressure 1200#. Plug pumped to shut off at 3537'. 2nd stage thru DV tool at 1152' with 325 sacks 4% Gel. Maximum pressure 600#. Closed DV tool. Circulated approximately 25 sacks cement out of head.

After waiting over 30 hours tested DV tool with 1000# for 30 minutes. There was no drop in pressure. Drilled out DV tool. Tested casing with 1000# for 30 minutes. There was no drop in pressure.

Witnessed by J. E. Sneed Gulf Oil Corporation Drilling Foreman
(Name) (Company) (Title)

Approved: OIL CONSERVATION COMMISSION


 (Name)

(Title)

(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name E. J. Taylor

Position Area Prod. Supt.

Representing Gulf Oil Corporation

Address Box 2167, Hobbs, New Mex.