


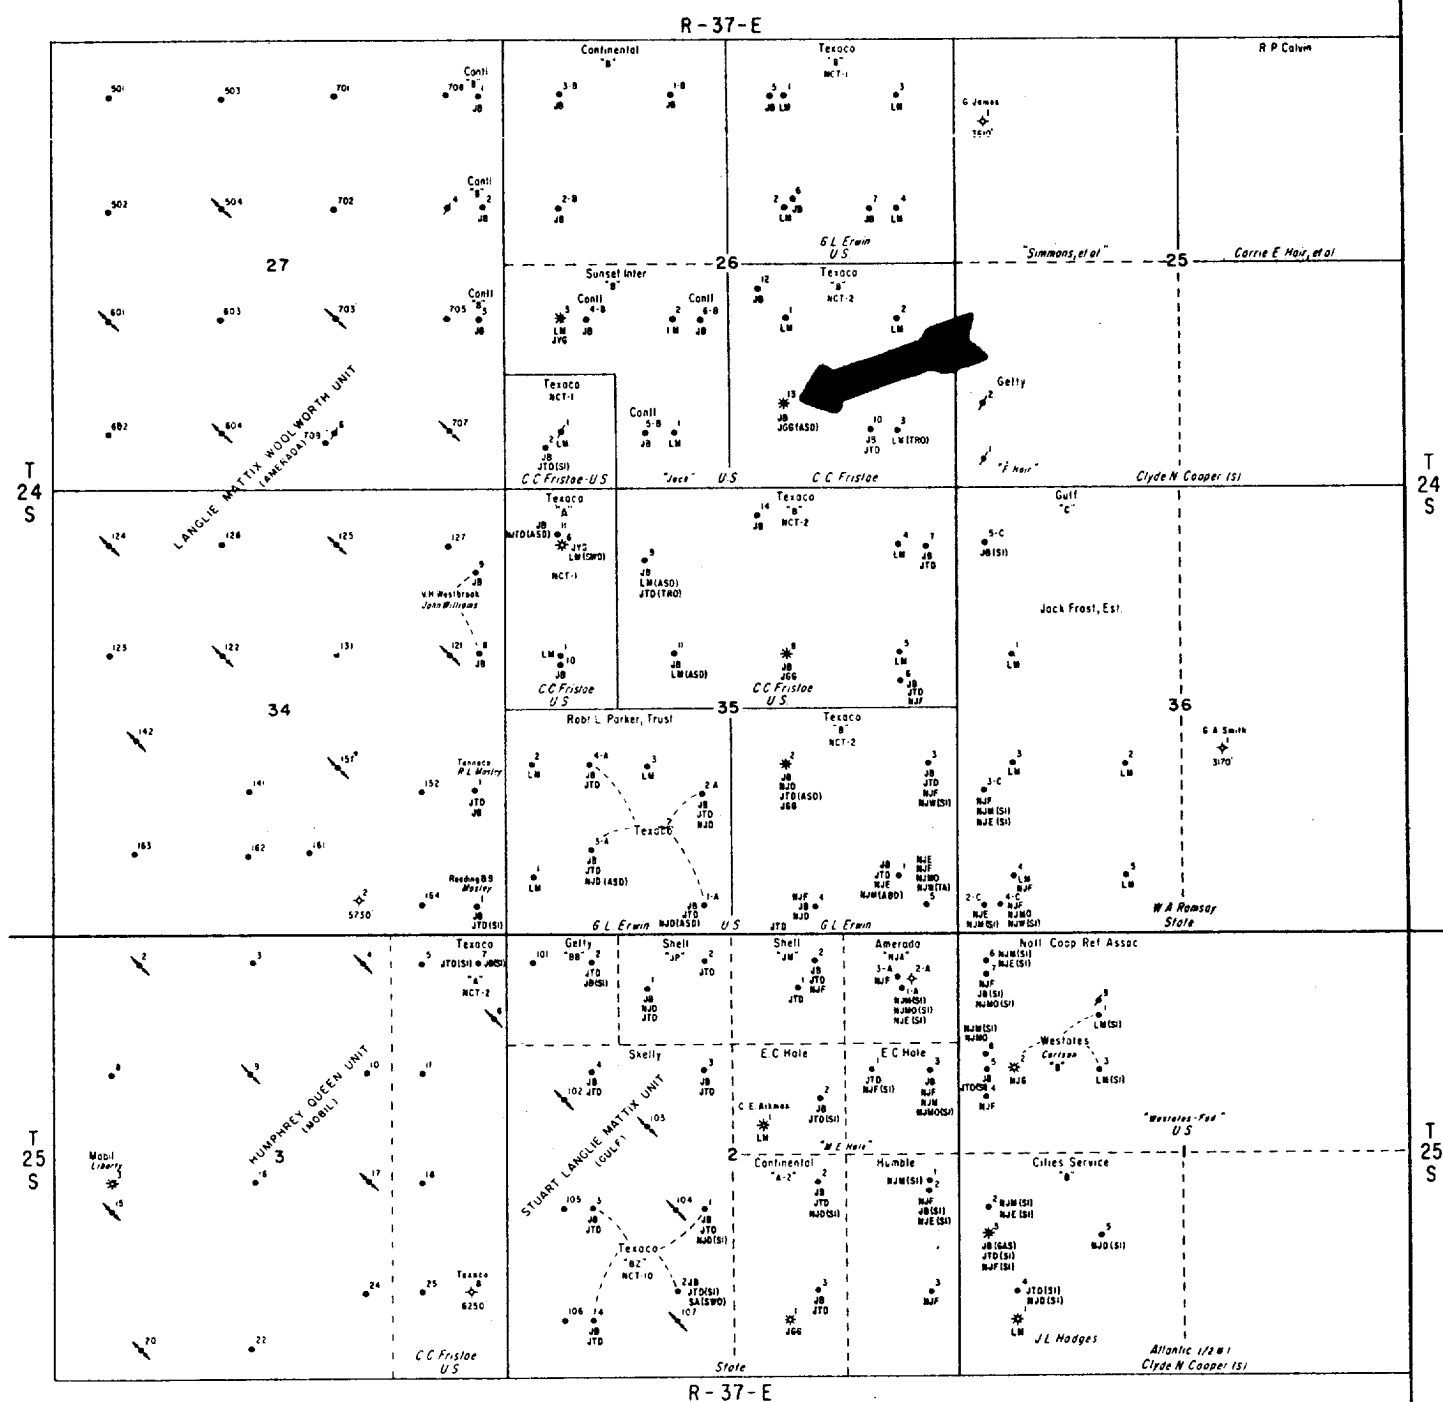

POOL INDEX

JY	JALMAT YATES GAS	NJE	NORTH JUSTIS ELLENBURGER
JB	JUSTIS BLINEBRY	NJF	FUSSELMAN
JGG	JUSTIS GLORIETA GAS	NJM	McKEE
JTD	JUSTIS TUBB-DRINKARD	NJMO	MONTOYA
LM	LANGUE MATTIX 7 RIVERS	NJTD	TUBB-DRINKARD
NJB	NORTH JUSTIS BLINEBRY	NJW	WADDELL
NJD	DEVONIAN		

LEGEND

(ABD)	ABANDONED
(ASD)	ABANDONED-SALVAGE DEFERRED
(SI)	SHUT IN
(SWD)	SALT WATER DISPOSAL
(TA)	TEMPORARILY ABANDONED
(ITRO)	TO BE RECONDITIONED FOR OIL

TEXACO Inc.
JUSTIS & LANGUE MATTIX POOLS
LEA COUNTY, NEW MEXICO

SCALE 0' 1000' 2000'



RECEIVED

JUN 8 1977

U.S. DEPARTMENT OF COMMERCE
WASHINGTON, D.C.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.
J. LEASE DESIGNATION AND SERIAL NO.

NM 14218

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐
2. NAME OF OPERATOR
TEXACO Inc.
3. ADDRESS OF OPERATOR
P. O. Box 728 - Hobbs, New Mexico 88240
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface Wells located 990' FSL & 1979' FEL of
Section 26, T-24-S, R-37-E, Unit Letter 'O', Lea County,
New Mexico.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

C.C. Fristoe 'B' Fed. NCT-2

9. WELL NO.

13

10. FIELD AND POOL, OR WILDCAT

Langlie Mattix

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 26, T-24-S, R-37-E

14. PERMIT NO.

Regular

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3188'

12. COUNTY OR PARISH

Lea

13. STATE

New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

PULL OR ALTER CASING ☐

FRACTURE TREAT ☐

MULTIPLE COMPLETE ☐

SHOOT OR ACIDIZE ☐

ABANDON* ☐

REPAIR WELL ☐

CHANGE PLANS ☐

(Other) Recomplete in Langlie-Mattix

X

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

REPAIRING WELL ☐

FRACTURE TREATMENT ☐

ALTERING CASING ☐

SHOOTING OR ACIDIZING ☐

ABANDONMENT* ☐

(Other) ☐

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. Rig up.
2. Set CIBP in abandoned Glorieta string @ 3550' & dump 20' cement on plug.
3. Perforate 2-7/8" OD casing (former Glorieta string) w/1-JSPF from 3366-3371', 3373-3377', 3379-3382', 3385-3388', 3425-3432', w/2 JSPF @ 3447', 3456' & 3461'.
4. Acidize perforations 3366-3461' w/2000 gals 15% NE HCL in 4 equal stages using 14 ball sealers after each stage.
5. Swab, install production equipment, test & place Langlie Mattix on production.

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Asst. District Supt.

DATE 3-16-77

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

APPROVED

MAR 17 1977

BERNARD MOROZ
ACTING DISTRICT ENGINEER

*See Instructions on Reverse Side

APPROVED

RECEIVED

1987