

Form 9-331
Dec. 1973Form Approved.
Budget Bureau No. 42-R1424UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other2. NAME OF OPERATOR
AMOCO PRODUCTION COMPANY3. ADDRESS OF OPERATOR
P. O. Box 68, Hobbs, NM 882404. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1980' FSL & 1980' FWL, Sec. 9
AT TOP PROD. INTERVAL: (Unit K, NE/4 SW/4)
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☐
☒
☒
☐
☐
☐
☐
☐
☐
☐

RECEIVED

JUN 13 1979

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

U. S. GEOLOGICAL SURVEY
HOBBS, NEW MEXICO5. LEASE
NM-14212

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Langlie C Federal9. WELL NO.
210. FIELD OR WILDCAT NAME
Jalmat Yates Seven Rivers11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
9 - 25 - 3712. COUNTY OR PARISH
Lea13. STATE
NM

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
3149.8 GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Moved in Service Unit 5-5-79. Pulled rods and pump. Installed BOP.

Set cast iron bridge plug at 3,370' and cap with 35' cement. Perforate intervals 2,982'-2,987', 2,996'-3,022', 3,066'-3,096', and 3,105'-3,124' using 2 JSPF. Set packer at 2,855' and set tailpipe at 2,915'. Acidized perfs with 5,000 gal 7-1/2% MSR-150 acid with 1000 SCF N₂/bbl. Frac with 60,000 gal. EZE-Frac 60 J347 plus 10,000# FLA-100 plus 33,000# 20/40

sand plus 24,000# 10/20 sand in 2 stages. Dropped 100 ball sealers between (OVER)

Subsurface Safety Valve: Manu. and Type

Set @ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED

Ray Cox

TITLE

Admin. Supervisor

DATE

6-11-79

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:


0+4 - USGS, H

1 - BD

1 - Susp

1 - Hou

*See Instructions on Reverse Side

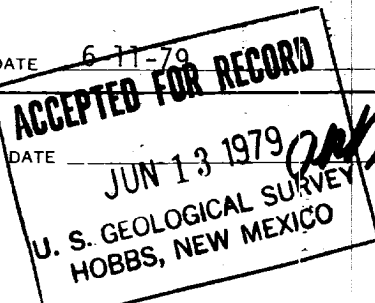

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

GPO : 1975 O - 214-149

stages. —Flushed with 75 BW X Frac 10 J347-X—
33% CO₂. Currently evaluating further completion
operations.

RECEIVED

JUL 10 1973

O.C.D. HOBBS, OFFICE