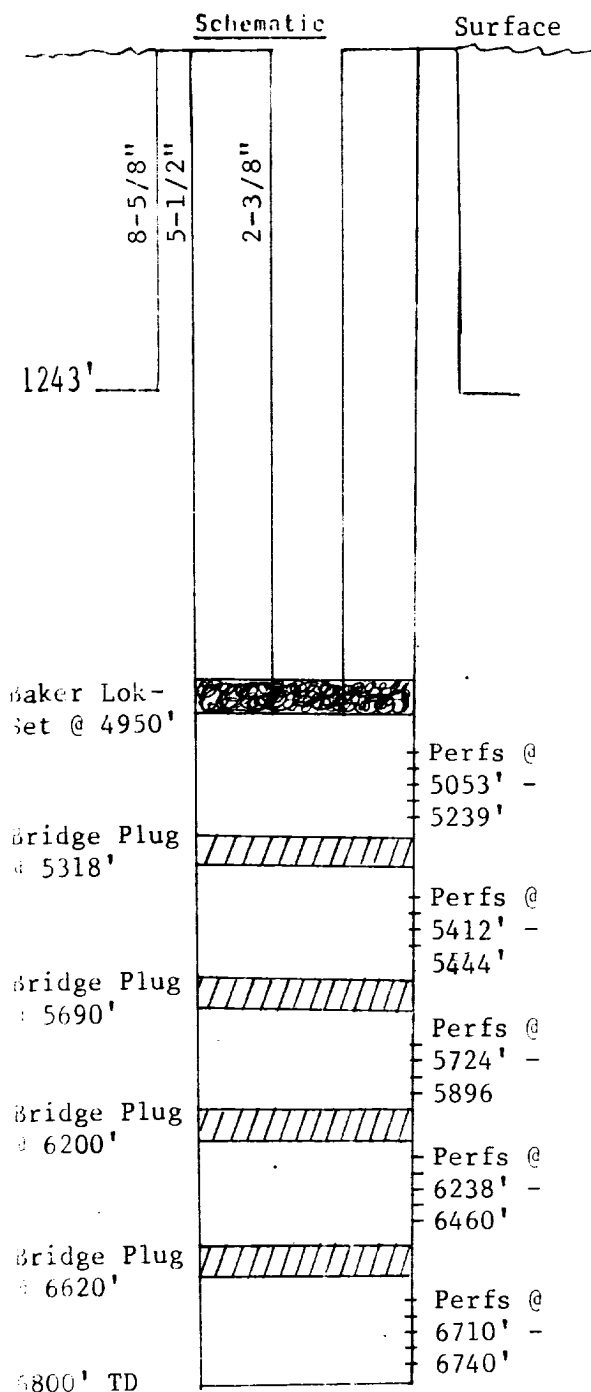


INJECTION WELL DATA SHEET

ALPHA TWENTY-ONE PRODUCTION COMPANY

BUCKSKIN FEDERAL

OPERATOR		LEASE		
3	1650' FSL & 1980' FWL	18	24-S	38-E
WELL NO.	FOOTAGE LOCATION	SECTION	TOWNSHIP	RANGE

Tabular DataSurface CasingSize 8-5/8" " Cemented with 650 sx.TOC Surface feet determined by circulatedHole size 12-1/4"Intermediate CasingSize " Cemented with sx.TOC feet determined by Hole size Long stringSize 5-1/2" " Cemented with 2190 sx.TOC Surface feet determined by circulatedHole size 7-7/8"Total depth 6800'Injection interval5053 feet to 5239 feet
(perforated or ~~xxxxxx~~ indicate which)Tubing size 2-3/8" lined with plastic set in a
(material)Baker Lok-Set packer at 4950 feet
(brand and model)

(or describe any other casing-tubing seal).

Other Data1. Name of the injection formation San Andres2. Name of field or Pool (if applicable) 3. Is this a new well drilled for injection? ☐ Yes ☒ NoIf no, for what purpose was the well originally drilled? originally drilled as
an oil well4. Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail (sacks of cement or bridge plug(s) used) Perfs @ 6710 - 6740;6238 - 6460; 5724 - 5896; 5412 - 5444. Bridge plugs @ 6620, 6200, 5690, 5318

RECEIVED
FEB 28 1983
O.C.D.
HOBBS OFFICE