

Submit 3 Copies To Appropriate District

Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO.

30-025-32773

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name:

West Dollarhide Drinkard Unit

8. Well No.

150

9. Pool name or Wildcat

Dollarhide Tubb Drinkard

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:

Oil Well ☐ Gas Well ☒ Other

2. Name of Operator

Chevron USA, Inc.

3. Address of Operator

15 Smith Rd. Midland, Tx 79705

4. Well Location

Unit Letter P : 650 feet from the south line and 540 feet from the east line

Section 31

Township 24-S

Range 38-E

NMPM

County Lea

10. Elevation (Show whether DR, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

1. Notify OCD 24hrs prior to MI & RU
2. Set 5 1/2 CIBP @ 6275, spot 25sx plug 6275-6075(Drinkard) WOC Tag.
3. Displace hole w/MLF 9.5 # Brine w/25 # Gel P/BBL.
4. Spot 25sx plug 3800-3600(Queen)
5. Spot 25sx plug 2600-2400(B-salt, Yates) WOC Tag.
6. Spot 25sx plug 1200-1000(8 5/8 shoe, T-salt)WOC Tag.
7. Perf 4 holes @ 275, sqz 70sx plug 275-surf, 5 1/2 X 8 5/8 csqs (surf) WOC Tag.
8. Install dry hole marker.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

G.R. Bledsoe

TITLE

HES Specialist

DATE *12/2/2002*

Type or print name

G.R. Bledsoe

Telephone No. *915.687.7153*

(This space for State use)

APPROVED BY

ORIGINAL SIGNED BY
CHRIS WILLIAMS

TITLE

GENERAL MANAGER

DATE *DEC 02 2002*

Conditions of approval, if any:


5
C

PLUGGING & ABANDONMENT WORKSHEET

(2 STRING CSNG)

OPERATOR CHEVRON USA INC.
LEASE NAME WEST DOWAETIDE DRINKARD UNIT
WELL # 150

SECT 31 TWN 14-S RNG 38-E
FROM 650 NSL 540 EWL
TD 6975 FORMATION @ TD Drinkard
PBDT FORMATION @ PBDT

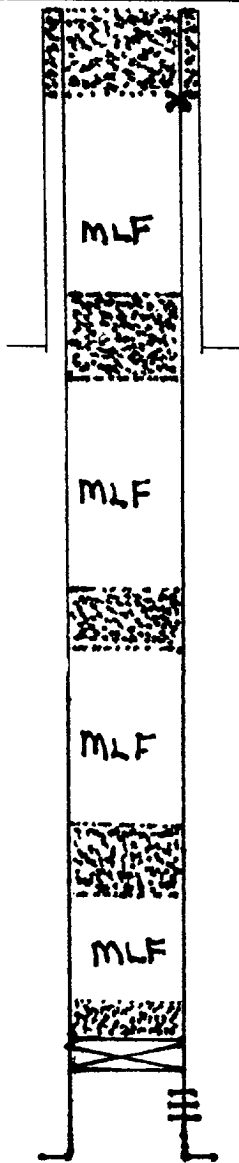

8 5/8
@ 1150
TOC SURF

5 1/2
@ 6975
TOC 275'

TD 6975

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	8 5/8	1150	SURF	Circ.
INTMED 1				
INTMED 2				
PROD	5 1/2	6975	275	T.S.

	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					

	CUT & PULL	TOP - BOTTOM
INTMED 1	PERFS	6334-6530
INTMED 2	OPENHOLE	
PROD		

*REQUIRED PLUGS DISTRICT

	PLUG	TYPE PLUG	SACKS CEMENT	DEPTH
RUSTLER (ANHYD)	1	CIBP	25	6275
YATES	2	QUEEN	25	3800
QUEEN	3	B-SALT	25	2600
GRAYBURG	4	8 5/8 S	25	1200
SAN ANDRES	5	SURF	70	275
CAPITAN REEF				
DELAWARE				
BELL CANYON				
CHERRY CANYON				
BRUSHY CANYON				
BONE SPRING				
GLORIETA				
BLINBRY				
TUBB				
DRINKARD				
ABO				
WC				
PENN				
STRAWN				
ATOKA				
MORROW				
MISS				
DEVONIAN				