


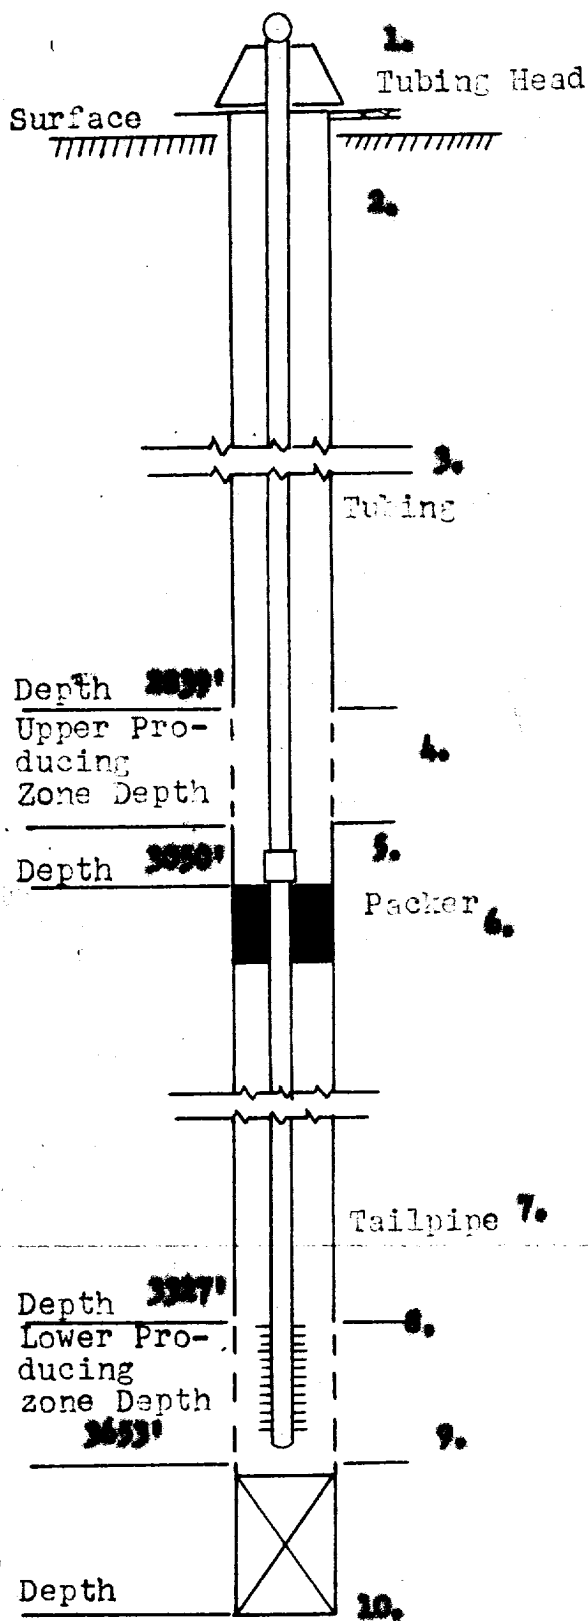

Lease and Well No. **Courtland Myers "B" No. 13**  
 Field **Salinas-Langlie Matlin** State **New Mexico**

### DUAL COMPLETION EQUIPMENT

| ITEM | DESCRIPTION, MAKE AND SIZE                                                                       |
|------|--------------------------------------------------------------------------------------------------|
| 1.   | Tubing Head: 6" - 600 Series Type 6 ML Roster tubing head; 4000 psi test                         |
| 2.   | Oil String Casing: 7" 20#, J-55 Set At 3495' with 1650 sacks                                     |
| 3.   | Tubing: 2", 4.7#, EUE Set in Packer                                                              |
| 4.   | Upper Perforations: Yates-Seven Rivers to be perforated at various intervals from 3039' to 3050' |
| 5.   | Garrett Circulating Valve at 3225'                                                               |
| 6.   | Baker Model D Production Packer set at 3230'                                                     |
| 7.   | Tailpipe: 2" 4.7# EUE tubing to approximately 3400'                                              |
| 8.   | Lower Perforations: Queen perforated at various intervals from 3327' to 3653'                    |
| 9.   | Plug Back Depth: 3665'                                                                           |
| 10.  | Total Depth: 3677'                                                                               |

STANOLIND OIL & GAS COMPANY

DUAL COMPLETION SKETCH

SCALE:

DRG. NO.

None

10-23-56